

RUNERGY

润阳股份

HY-DH132N11

Pro抗雹

600-630W

23.3%

最高效率

N-Type

双面&双玻

132片

半片



先进技术

采用N型电池和新型210R产品技术平台，集成先进设计和制造工艺，量产效率和可靠性行业领先。



高发电量

双面发电。温度系数低。弱光相应好。抗LID、LeTID、PID衰减。增加发电量，显著降低LCOE。





强化抗冰雹能力

正面使用加厚全钢化玻璃，冰雹测试通过55mm，33.9m/s冲击。



质量可靠

耐久的产品结构，严格的质量控制体系，完善的售后保障服务。保证产品长期运行过程中的可靠性、稳定性。

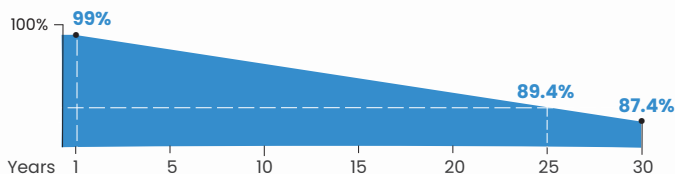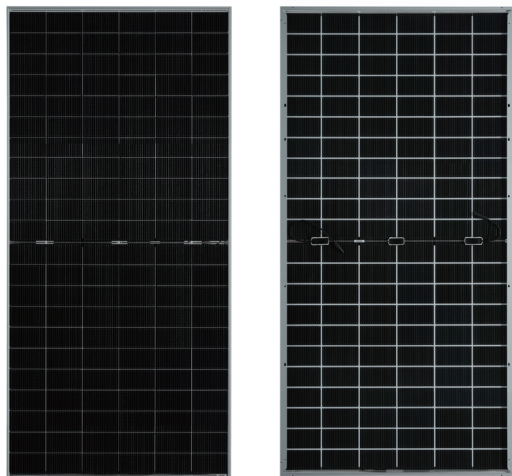

润阳N型双玻组件功率保证

· 首年功率衰减 **<1.0%**，每年线性功率衰减 **<0.4%**



12年材料与工艺质保



30年线性功率质保

IEC61215 / IEC61730 / UL61730 / IEC61701 / IEC62716 / IEC60068 / ISO9001 / ISO14001 / ISO45001



www.runergy.cn
sales-inform@runergy.com

Table with 2 columns: Parameter and Value. Rows include: 结构参数 (Structure Parameters), 电池片型号 (Cell Model), 电池片数量 (Cell Quantity), 组件尺寸 (Module Size), 组件重量 (Module Weight), 接线盒 (Junction Box), 输出线缆 (Output Cable), 连接器 (Connector), 前面板 (Front Panel), 后面板 (Back Panel), 边框 (Frame), 装箱数量 (Packing Quantity).

Table with 2 columns: Parameter and Value. Rows include: 工作参数 (Operating Parameters), 最大系统电压 (Maximum System Voltage), 工作温度 (Operating Temperature), 最大保险丝额定电流 (Maximum Fuse Rated Current), 最大静态载荷 (Maximum Static Load), 双面率 (Bifaciality Ratio), 冰雹测试 (Hail Test), 防火等级 (Fire Rating).

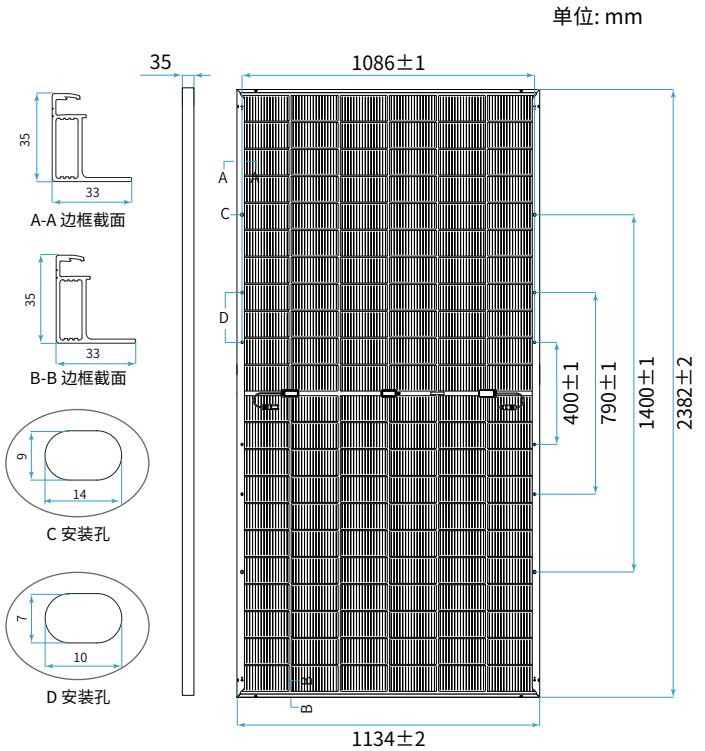


Table with 8 columns: Parameter, 630, 625, 620, 615, 610, 605, 600. Rows include: 电气参数 - STC (Electrical Parameters - STC), 功率等级 (Power Class), 功率公差 (Power Tolerance), 最大功率点电压 (Maximum Power Point Voltage), 最大功率点电流 (Maximum Power Point Current), 开路电压 (Open Circuit Voltage), 短路电流 (Short Circuit Current), 组件效率 (Module Efficiency).

Table with 8 columns: Parameter, 693, 688, 683, 677, 671, 666, 660. Rows include: 电气参数 - BNPI (Electrical Parameters - BNPI), 最大功率点功率 (Maximum Power Point Power), 最大功率点电压 (Maximum Power Point Voltage), 最大功率点电流 (Maximum Power Point Current), 开路电压 (Open Circuit Voltage), 短路电流 (Short Circuit Current).

Table with 4 columns: Parameter, 5%, 15%, 25%. Rows include: 背面功率增益 (背面功率615W) (Back Power Gain (Back Power 615W)), 背面功率增益率 (Back Power Gain Rate), 最大功率点功率 (Maximum Power Point Power), 最大功率点电压 (Maximum Power Point Voltage), 最大功率点电流 (Maximum Power Point Current), 开路电压 (Open Circuit Voltage), 短路电流 (Short Circuit Current), 组件效率 (Module Efficiency).

Table with 2 columns: Parameter and Value. Rows include: 温度性能 (Temperature Performance), 组件标称工作温度 (Module Nominal Operating Temperature), 电池标称工作温度 (Cell Nominal Operating Temperature), 功率温度系数 (Power Temperature Coefficient), 开路电压温度系数 (Open Circuit Voltage Temperature Coefficient), 短路电流温度系数 (Short Circuit Current Temperature Coefficient).

